

75X35X45-S3 2.0



AUSTROFLAMM







[www.austroflamm.com](http://www.austroflamm.com)

# 75X35X45-S3 2.0



AUSTROFLAMM

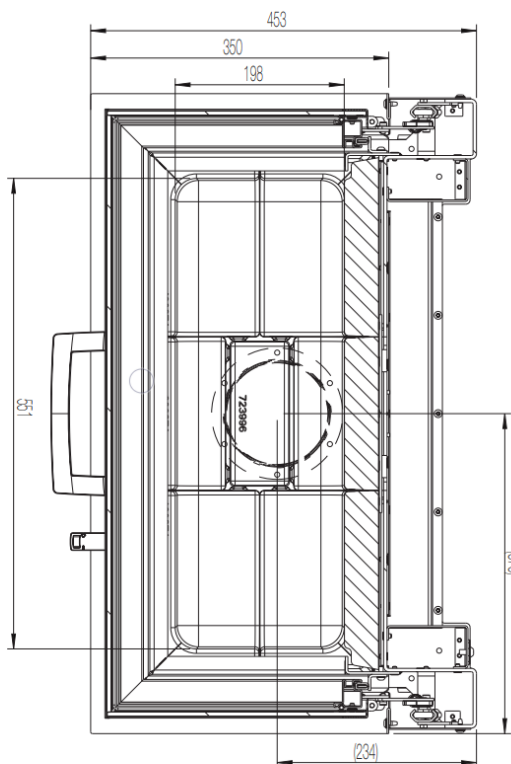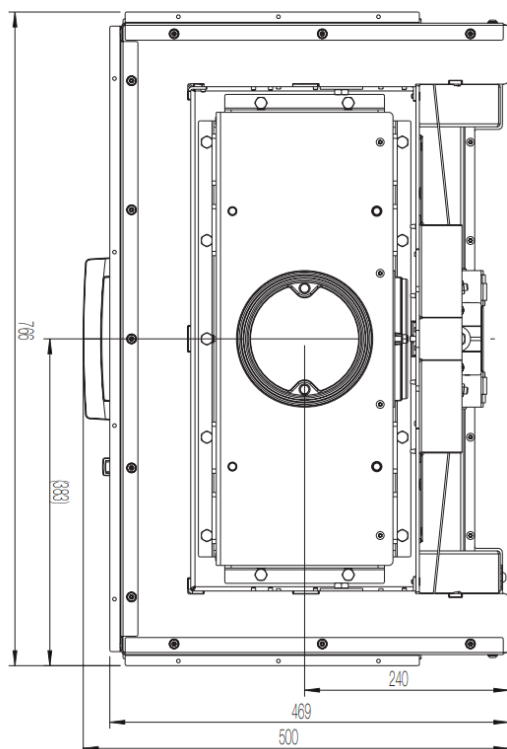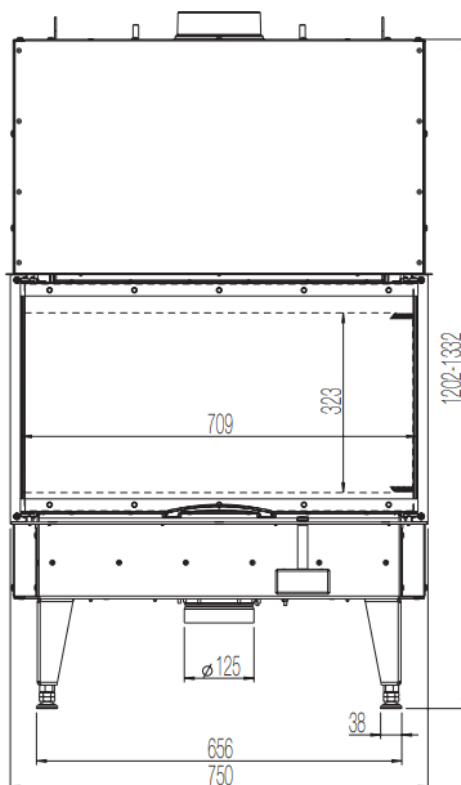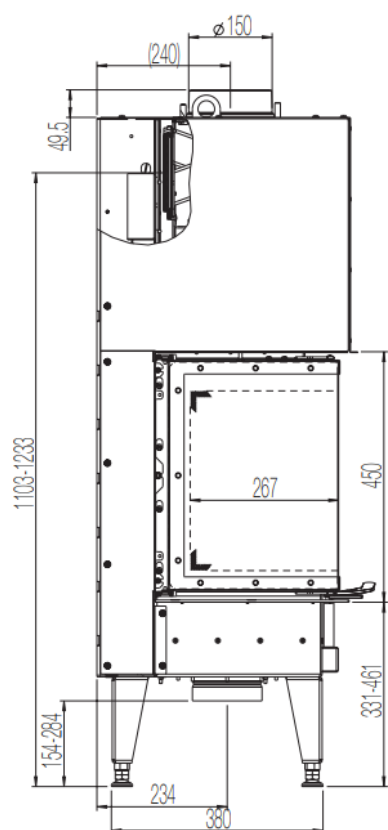

o standard

Z Accessories

- not available

DIMENSIONS AND WEIGHTS	
Height [mm]	1252-1390
Width [mm]	786
Depth [mm]	469
Weight [kg]	218
Width (body installation dimension) [mm]	750
Door frame, height [mm]	450
Flue pipe outlet, diameter [mm]	150
Insulation layer thicknesses to the installation floor [mm] (Promasil 950 KS)	0
Insulation layer thicknesses lateral / rear [mm] (Promasil 950 KS)	0/60
Insulation layer thicknesses to the ceiling [mm] (Promasil 950 KS)	120
Ceramic flues - max. length [m]	-
HEAT OUTPUT	
Nominal heat efficiency [kW] lt. EN test EN 13229	10
Heat output, minimum [kW] / Maximum heat output [kW]	5-14
Energy efficiency category	A
Circulating air cross-section without / with metal secondary heating surface [cm <sup>2</sup> ]	718
FEATURES	
Double pane	x
Sliding door	yes
DATA FOR THE CHIMNEY SWEEP	
Total flue gas flow [g/s]	11.49
Flue gas temperature [°C]	263
Minimum feed pressure at nominal heat efficiency [Pa]	12