


CLOU COMPACT PELLET



www.austroflamm.com

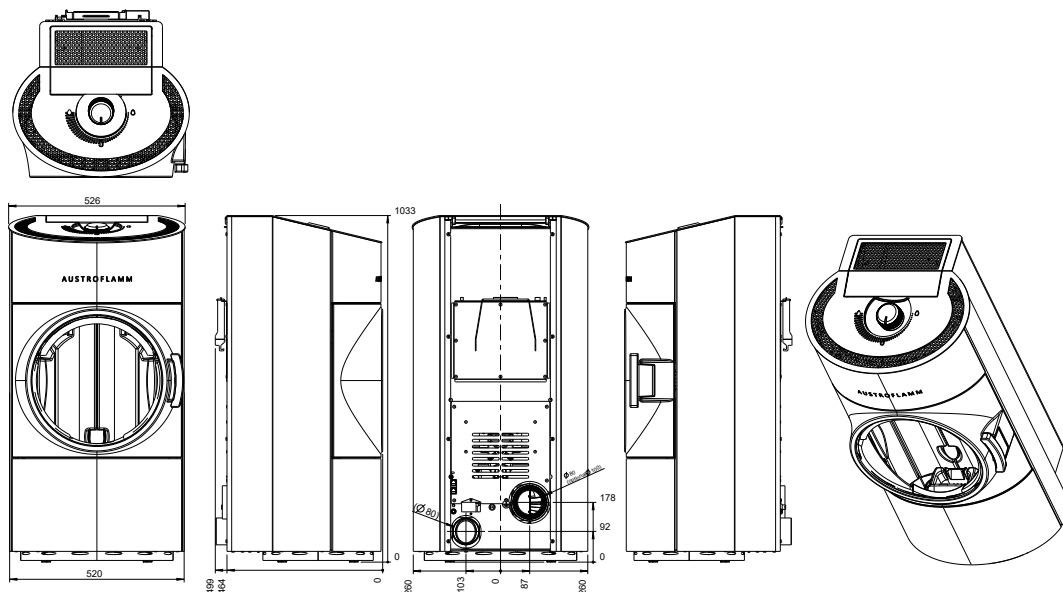

DIMENSIONS AND WEIGHTS

Height / Width / Depth [mm]	1033 x 520 x 499
Flue pipe outlet, diameter [mm]	80
Outside air connection [Ø mm]	80
Weight [kg]	150
b: Connection height with flue pipe rear [mm]	178
f: Flue pipe connection from right [mm]	260
g: Connection height, outside air [mm]	92
h: Outside air connection from left [mm]	157

OUTPUT

Nominal heat efficiency [kW] as per EN 14785	6
Min. / max. heat output [kW]	2-6
Min. / max. space heating capacity [m ³]	65-165
Pellet hopper [kg/l]	≈ 26/40
Min. / max. fuel consumption [kg/h]	0.5-1.55
Min. / max. burning time [h]	≈ 16- 52
Power connection [V/Hz]	230/50
Safety distances to combustible materials front / side / rear [mm]	800 / 100 / 100

FITTINGS

Room thermostat	o
(Weekly) timer	-
Automatic grate	-
Independent of ambient air	o
WLAN	Z
Remote control	-
Convection module	-

DATA FOR THE CHIMNEY SWEEP

Flue gas mass flow [g/s] closed	5.0
Flue gas temperature [°C] closed	164
Minimum delivery pressure at nominal heat output [Pa] closed	12
Minimum delivery pressure for chimney calculation [Pa]	3