






PERRY



AUSTROFLAMM



[www.austroflamm.com](http://www.austroflamm.com)

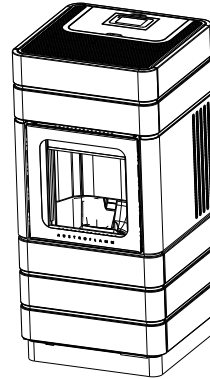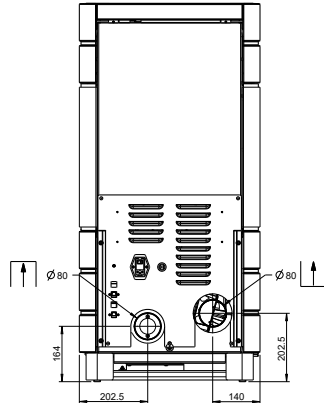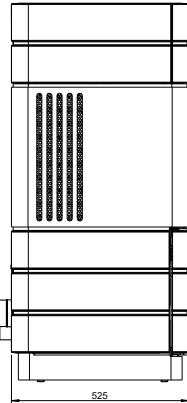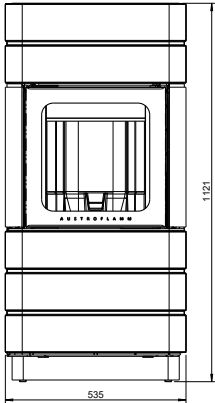

## DIMENSIONS AND WEIGHTS

Height [mm]	1121
Width [mm]	535
Depth [mm]	525
Flue pipe outlet, diameter [mm]	80
Outside air connection [Ø mm]	60
Weight steel casing (STM) / ceramic casing (KMG) [kg]	182 / 205
b: Connection height with flue pipe rear [mm]	202,5
f: Flue pipe connection from right [mm]	140
g: Connection height, outside air [mm]	164
h: Outside air connection from left [mm]	202,5

## HEAT OUTPUT

Nominal heat efficiency [kW] lt. EN 13240	8
Min. / max. heat output [kW]	2.2-7.5
Min / max space heating capacity [m³]	90-205
Pellet hopper [kg/l]	≈ 25/39
Min / max fuel consumption [kg/h]	0.5-1.7
Min / max burning time [h]	14-50

## FEATURES

Room thermostat	o
(Weekly) timer	o
Automatic grate	o
Independent of ambient air	o
Power connection [V/Hz]	230/50
WLAN	Z
Remote control	-
Convection module	-

## DATA FOR THE CHIMNEY SWEEP

Flue gas mass flow [g/s] closed	6.13
Flue gas temperature [°C] closed	208
Minimum delivery pressure at nominal heat output [Pa] closed	12