


POLLY 2.0



AUSTROFLAMM



www.austroflamm.com

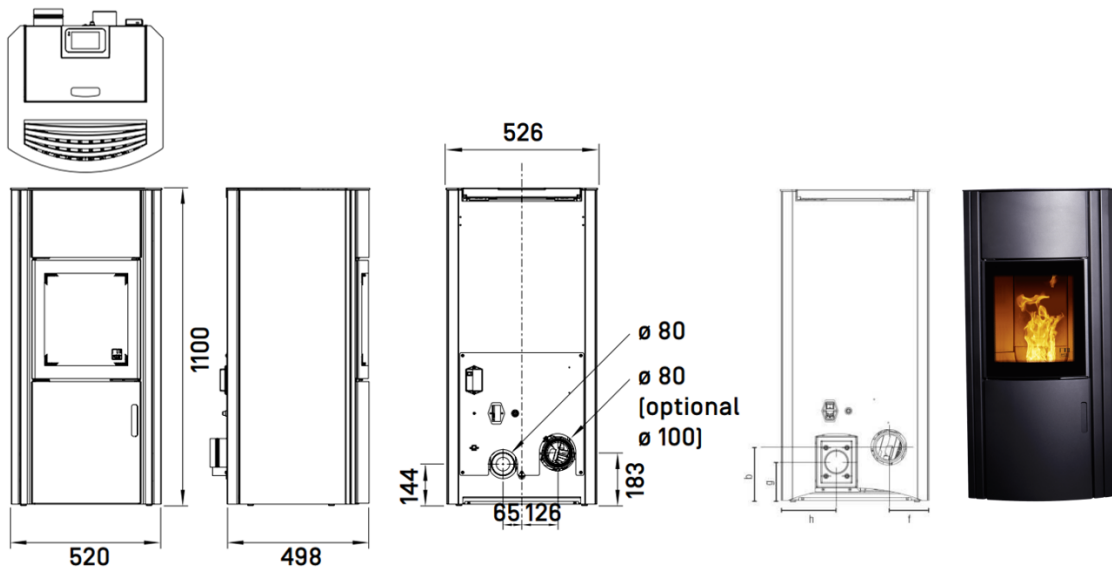

DIMENSIONS AND WEIGHTS

Height x width x depth [mm]	1100 x 520 x 498
Flue pipe outlet, diameter [mm]	80
Outside air connection [Ø mm]	80
Weight [kg]	158
b: Connection height with flue pipe rear [mm]	183
f: Flue pipe connection from right [mm]	134
g: Connection height, outside air [mm]	144
h: Outside air connection from left [mm]	195
Firebox h x w x d [mm]	
Safety distances to combustible materials front / side / rear [mm]	800 / 200 / 100

OUTPUT

Nominal heat efficiency [kW] as per EN 14785	7.5
Min. / max. heat output [kW]	2.4-7.7
Min. / max. room-heating capacity [m ²]	98-255
Pellet hopper [kg/l]	≈ 25/39
Min. / max. fuel consumption [kg/h]	0.6-1.9
Min. / max. burning time [h]	≈ 13- 42
Power connection [V/Hz]	230/50

FITTINGS

Room thermostat	o
(Weekly) timer	o
Automatic grate	o
Balanced flue	o
WLAN	Z
Remote control	o
Air distribution module	-

DATA FOR THE CHIMNEY SWEEP

Flue gas mass flow [g/s] closed	4.9
Flue gas temperature [°C] closed	207
Minimum delivery pressure at nominal heat output [Pa] closed	12
Minimum delivery pressure for chimney calculation [Pa]	3